

ASL 200 SERIES

SLIDING DOOR SYSTEM

The Talbot ASL200 series automatic door system offers an optimal blend of affordability, dependability, and intelligence, making it an ideal choice for a diverse array of commercial settings. Engineered to accommodate door leaves weighing up to 150Kg, it ensures seamless functionality and robust performance for various applications.



Key Features

- The ASL200 system features an advanced control system that quickly and accurately detects door size and weight. This ensures smooth operation by automatically adjusting parameters for optimal performance.
- Obstruction sensitivity - if when closing it meets an obstruction the doors will automatically re-open. When the power is off, the doors are easily manually opened or closed.
- Each system comes standard with a dedicated normally closed fire trip signal input as well as compatibility with a wide range of access control systems
- The slim track profile provides an unobtrusive and sleek door operator that can be installed both above and below ceiling level.



Quality Componentry

Highly efficient long life and high torque brush-less DC motor alongside an intelligent microprocessor that automatically detects door weight and adjusts accordingly to ensure smooth door operation.



Unparalleled safety

- Obstruction sensitivity
- Dedicated fire trip input
- wide range of safety detection sensor options available



Easy To Customize

Each door controller comes standard with a wide range of inputs and outputs without the need for any additional interface boards.

GET IN TOUCH

1300 560 608

sales@talbotautodoors.com.au
www.talbotautodoors.com.au


Unit 8, 63 Norman St
Peakhurst NSW, 2210

Technical Specifications


Power Voltage	AC 240v 50-60Hz
Motor	DC24v - 65w
Max door leaf weight	150Kg Per Leaf
Manual open/ close force	<100N
Opening Speed	200 - 500mm/s
Closing Speed	200 - 500mm/s
Door hold open time	0 - 10 s
Noise	55Db or less
Working Temperature	-20C to 50C

Door Configurations

Single Slide




Bi-Parting

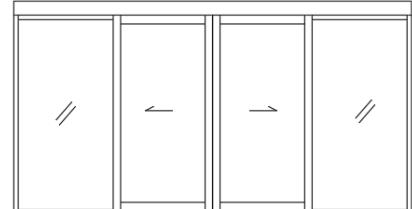

the ASL200 is designed for both aluminum framed and frame-less glass door leaves up to 3000mm wide.

Operation modes:

- Auto - Sensor access inside and outside
- Open - Door hold open function
- Exit - Outside sensor disables, inside sensor functions
- Lock - Door locked

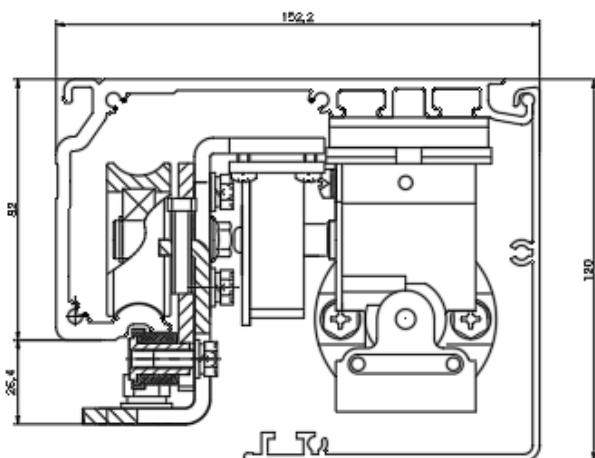

Projects



Oatley, NSW
Oatley Hotel



Canberra, ACT
ANU Pharmacy



North Sydney, NSW
15 Blue St



Sydney, NSW
Alphera Office Fitout

GET IN TOUCH

1300 560 608

sales@talbotautodoors.com.au
www.talbotautodoors.com.au

Unit 8, 63 Norman St
Peakhurst NSW, 2210